



Модуль светодиодный Indoor PM4 SMD RGB GKJM1Z-1066C GKGD

Артикул GKJM1Z-1066C PM4 Indoor RGB


В наличии 14 шт.

Склад Красноярск 14 шт.

Характеристики

Производитель	GKGD
Цвет свечения	RGB
Шаг пикселя, мм	4
Плотность пикселя, pix/m2	62 500
Конфигурация пикселя	1R1G1B
Тип светодиода	SMD2121
Размер модуля, мм	320*160
Вес модуля, г	360
Разрешение модуля, мм	80*40
Количество модулей в m2	19.53
Минимальное расстояние для просмотра, м ...	4
Яркость, cd/m2	600
Угол обзора	120
Интерфейс	HUB75E-16P
Напряжение, VDC	4.8-5.5
Максимальное потребление, w/m2	351
Среднее потребление, w/m2	175
Уровень серого	15 bit
Кадров в секунду	60
Частота обновления, Hz	1920

Specification of P4 Indoor LED Module		Module photo
Pixel pitch	4mm	
Pixel Density	62 500 dots/m²	
Pixel configuration	R1G1B1B	
LED type	SMD2121	
Module size	1600*1100mm	
Module weight	360kg	
Module resolution	1600*1100 dots	
Module QTY/ m²	19.53 pcs/ m²	
Min. Viewing Distance	≥4m	
Brightness	≥600 cd/m²	
Viewing Angle	H=120° V=120°	
Driving Mode	1/20 scan constant current	
Resolution	1600*1100	
Input voltage	4.8-5.5VDC	
Max. Power Consumption	351 w/m²	
Avg. Power Consumption	175 w/m²	
Max. Current	5 A	
Gray Level	15bits (32768)	
Video frame rate	30 frames/s	
Refresh Rate	>1920Hz & >1920Hz	
Defective Data Rate	<0.0001 (LED industry standard: <0.0003)	
Decay Rate	<5%/year	
Brightness Conformity	>95%	
Colors	≥2768	
MTBF	>10000 hours	
Lifespan	>100000 hours	
Protective function	Over-heat/Over-load /Power-down /Power leakage /Lightning-protection etc.	
Operating Temperature	-10°C~+40°C	
Operating Humidity	10-80% no condensation	
Storage Temperature	-20°C~+50°C	
Storage Humidity	10-85% no condensation	
Control system parameter		
Color temperature	Adjustable by software	
Brightness level	56 levels automatic or manual adjustment	
Control way	Computer, real-time, off-line, wireless, infrared etc.	
Communication distance	Cats UTP 100 meters, max. 30 meters, or optical fiber	
Shipping		
Carton	Specification, size 435*80*44mm, weight: 12.5kgs	
Note: The specification may subject to change without prior notice.		

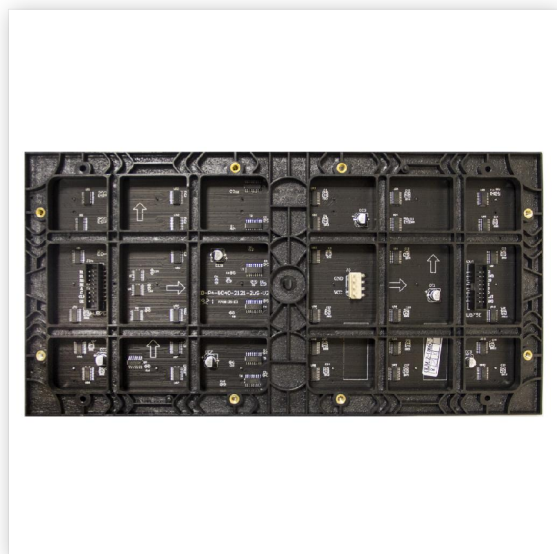

Перегрев, перегрузка, отключение питания, утечка энергии, молниезащита
 Рабочий диапазон температур, С от -10 до +40
 Рабочий диапазон влажности, % 10-80

