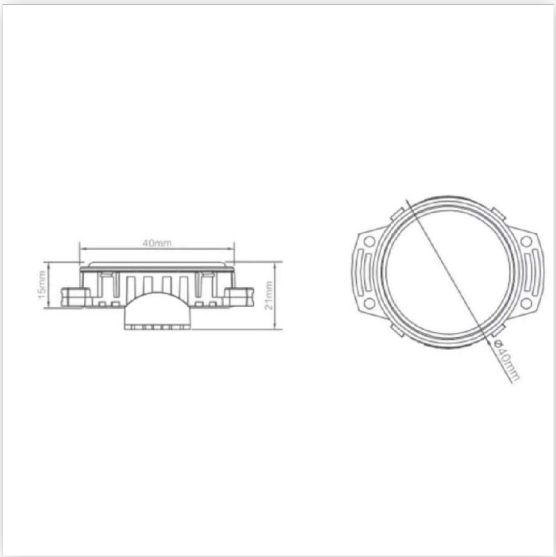

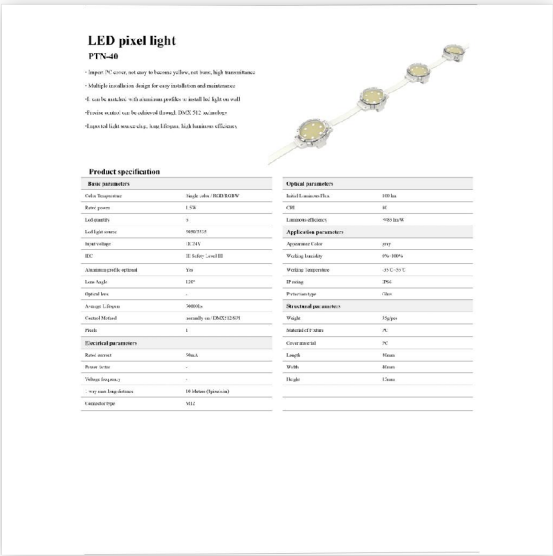

LED pixel light

PTN-40

- Impor: PC cover, not easy to become yellow, not bare, high transmittance
- Multiple installation design for easy installation and maintenance
- It can be matched with aluminum profiles to install bar light on wall
- Protection rating can be achieved through IP65/IP67 waterproof
- Equipped with non-welding, long lifespan, high luminous efficiency

Product specification

Base parameters	
Color Temperature	Single color / RGB/RGBW
Rated power	1.5W
Led quantity	5
Led light source	5050/2835
Input voltage	DC24V
IEC	IE Safety Level III
Aluminum profile optional	Yes
Lens Angle	120°
Optical lens	-
Average Lifespan	50000Hs
Control Method	accordy on: DMX512/SPI
Pixels	1
Electrical parameters	
Rated current	50mA
Power factor	-
Voltage frequency	-
One way max long distance	10 Meters (Spacecoin)
Connector type	M12

Optical parameters	
Rated Luminous Flux	100 lm
CRI	80
Luminous efficiency	>60 lm/W
Application parameters	
Apparatus Color	gray
Working humidity	0%-100%
Working temperature	-35°C-50°C
IP rating	IP66
Protection type	Glue
Structural parameters	
Weight	35g/pcs
Material of PT strips	PC
Cover material	PC
Length	40mm
Width	40mm
Height	12mm

Пиксель светодиодный PTN-40 (20 пикселей) Signimpress

Артикул PTN-40

В наличии	**24 упак.**
Склад Красноярск	22 упак.
Склад МО Одинцово	1 упак.
Склад Новосибирск	1 упак.

Характеристики

Производитель	SignImpress
Цвет свечения	RGB
Напряжение, V	24
Мощность, W	1.5
Степень защиты, IP	67
Тип светодиода	SMD
Материал корпуса	Пластик
Управляется контроллером	CS1, CS12, CS4, CS8
Диаметр, mm	40
Угол рассеивания	120
Длина провода, cm	20
Кол-во в упаковке, шт	20
Гарантия	1 год