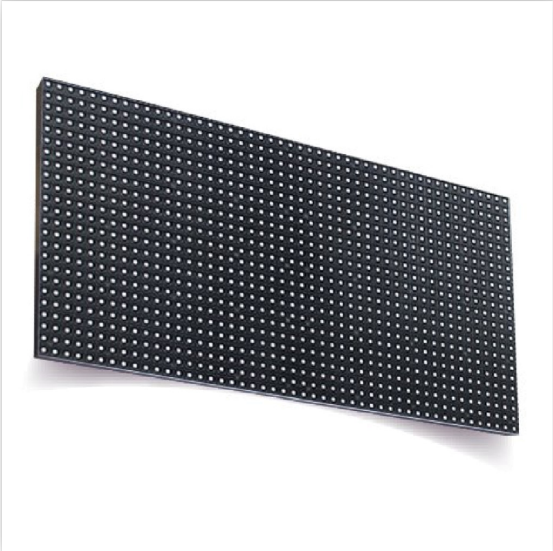

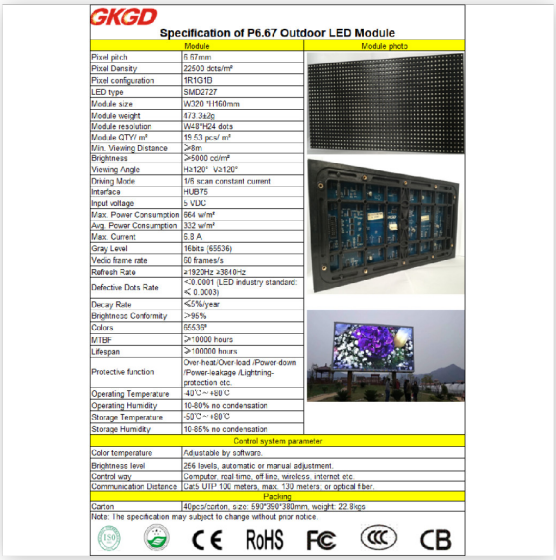

GKGD

Specification of P6.67 Outdoor LED Module

Module	Module photo
Pixel pitch	6.67mm
Pixel Density	22503 dots/m²
Pixel configuration	1R1G1B
LED type	SMD2727
Module size	W320*H160mm
Module weight	473.3±2g
Module resolution	W48*H24 dots
Module QTY/ m²	19.53 pcs/ m²
Min. Viewing Distance	≥8m
Brightness	≥5000 cd/m²
Viewing Angle	H≥120° V≥120°
Driving Mode	1/8 scan constant current
Interface	HUB75
Input voltage	5 VDC
Max. Power Consumption	664 w/m²
Avg. Power Consumption	332 w/m²
Max. Current	5.9 A
Gray Level	16bits (65536)
Vedio frame rate	60 frames/s
Refresh Rate	≥1920Hz ≥3840Hz
Defective Dots Rate	<0.0001 (LED industry standard: <0.0003)
Decay Rate	<5%/year
Brightness Conformity	>95%
Colors	65535*
MTBF	≥10000 hours
Lifespan	≥100000 hours
Protective function	Over-heat/Over-load /Power-down /Power-leakage /Lightning-protection etc.
Operating Temperature	-40℃~+80℃
Operating Humidity	10-80% no condensation
Storage Temperature	-30℃~+60℃
Storage Humidity	10-85% no condensation
Control system parameter	
Color temperature	Adjustable by software.
Brightness level	256 levels, automatic or manual adjustment.
Control way	Computer, real time, off line, wireless, internet etc.
Communication Distance	Cat5 UTP 100 meters, max. 120 meters, or optical fiber.
Packing	
Carton	40pcs/carton, size: 690*360*380mm, weight: 22.8kgs

Note: The specification may subject to change without prior notice.

Модуль светодиодный Outdoor P6.67 SMD RGB scan New GKGD

Артикул P6.67 Outdoor RGB

В наличии **0 шт.**

Характеристики

Производитель	GKGD
Цвет свечения	RGB
Шаг пикселя, mm	6.67
Плотность пикселя, pix/m2	22 500
Конфигурация пикселя	1R1G1B
Тип светодиода	SMD2727
Размер модуля, mm	320*160
Вес модуля, g	473.3
Разрешение модуля, mm	48*24
Количество модулей в m2	19.53
Минимальное расстояние для просмотра, m	8
Яркость, cd/m2	5000
Угол обзора	120
Интерфейс	HUB75
Напряжение, VDC	5
Максимальное потребление, w/m2	664
Среднее потребление, w/m2	332
Уровень серого	16 bit
Кадров в секунду	60
Частота обновления, Hz	1920

Перегрев, перегрузка, отключение питания, утечка энергии, молниезащита

Рабочий диапазон температур, C	от -40 до +80
Рабочий диапазон влажности, %	10-85

GKGD