

Модуль светодиодный Outdoor P6 SMD2727 RGB (192*192) GKGD

Артикул P6 Outdoor RGB

В наличии **2 шт.**


Склад МО Единцово 2 шт.

Характеристики

Производитель GKGD
 Температура хранения, С от -50 до +80
 Влажность при хранении, % 10-85

Компьютер, в режиме реального времени, автономный, беспроводной, интернет
 Расстояние связи, м Cat5 UTP 100-130; или оптическое волокно
 Уровень яркости . 256 уровней, автоматическая или ручная регулировка.
 Цветовая температура Регулируется программным обеспечением
 Режим сканирования 1/8
 Частота дефектных точек, менее 0.0001
 Скорость деградации диодов, менее 5%/год
 Соответствие яркости, более 95%
 Количество цветов 65536³
 Срок службы часов, не менее 100 000
 Цвет свечения RGB
 Шаг пикселя, мм 6
 Плотность пикселя, pix/m2 27778
 Конфигурация пикселя 1R1G1B
 Тип светодиода SMD2727
 Размер модуля, мм 192*192
 Вес модуля, г 282.5
 Разрешение модуля, мм 32*32
 Количество модулей в м2 27.127
 Минимальное расстояние для просмотра, м ... 6
 Яркость, cd/m2 5000
 Угол обзора 120/120
 Интерфейс HUB75
 Напряжение, VDC 5
 Максимальное потребление, w/m2 678
 Среднее потребление, w/m2 339
 Уровень серого 16 bit
 Кадров в секунду 60
 Частота обновления, Hz 1920

GKGD Specification of P6 Outdoor LED Module		Module	
Pixel pitch	6mm		
Pixel Density	27778 dots/m ²		
Pixel configuration	1R1G1B		
LED type	SMD2727		
Module size	W192*H192mm		
Module weight	282.5g		
Module resolution	31/32 LED dots		
Module QTY/ m ²	27.127 pcs/ m ²		
Min. Viewing Distance	2460		
Brightness	24600 cd/m ²		
Viewing Angle	H:120° V:120°		
Driving Mode	1/8 scan constant current		
Refresh Rate	146875		
Input voltage	5V		
Max. Power Consumption	678 w/m ²		
Avg. Power Consumption	339 w/m ²		
Max. Current	5.4A		
Gray Level	16bits (65536)		
Video frame rate	60 frames/s		
Refresh Rate	119230Hz (384Hz)		
Defective Data Rate	<0.0001 LED industry standard (<0.0003)		
Decay Rate	<5%/year		
Brightness Conformity	>95%		
Colors	1653P		
MTBF	>10000 hours		
Lifespan	>100000 hours		
Protective function	Over-heat/Over-load/Power-down/Power-leakage /Lightning-protection etc.		
Operating Temperature	-40°~+80°С		
Operating Humidity	10-90% no condensation		
Storage Temperature	-30°~+60°С		
Storage Humidity	10-90% no condensation		
Control system parameter:			
Color temperature	Adjustable by software		
Brightness level	256 levels, automatic or manual adjustment		
Control way	Computer, real-time, 485 lines, wireless, internet etc.		
Communication Distance	Cable UTP 100 meters, max. 130 meters, or optical fiber		
Packaging:			
Carton	140pcs/carton, size: 645*504*48mm, weight: 15.4kg		
Note: The specification may subject to change without prior notice.			

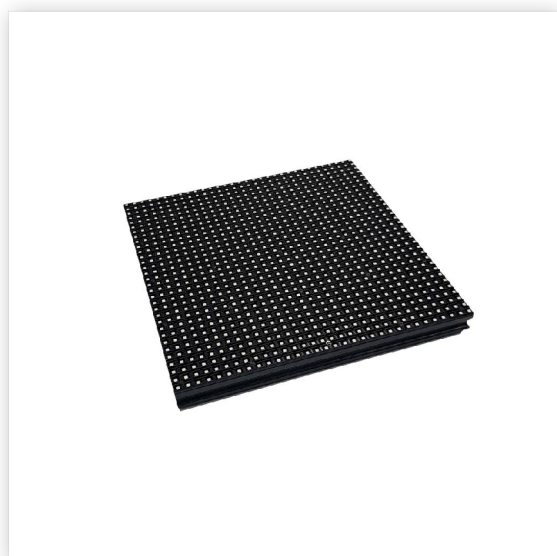

GKGD

 +7 (962) 070-10-10

 info@sepcom.ru

sepcom.ru