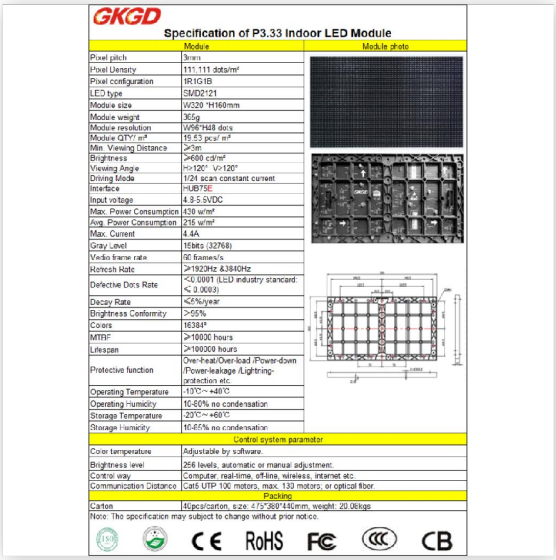
GKGD

Specification of P3.33 Indoor LED Module

Module	Module photo
Pixel pitch	3mm
Pixel Density	111.111 dots/m²
Pixel configuration	1R1G1B
LED type	SMD2121
Module size	W320*H160mm
Module weight	365g
Module resolution	W96*H48 dots
Module QTY/ m²	19.53 pcs/ m²
Min. Viewing Distance	>3m
Brightness	>600 cd/m²
Viewing Angle	H:>120° V:>120°
Driving Mode	1/24 scan constant current
Interface	HUB75E
Input voltage	4.8-5.5VDC
Max. Power Consumption	430 w/m²
Avg. Power Consumption	215 w/m²
Max. Current	4.4A
Gray Level	16bits (32768)
Vedio frame rate	60 frames/s
Refresh Rate	>1920Hz &3840Hz
Defective Dots Rate	<0.0001 (LED industry standard: ≤ 0.0003)
Decay Rate	<5%/year
Brightness Conformity	>95%
Colors	16384*
MTBF	>10000 hours
Lifespan	>100000 hours
Protective function	Over-heat/Over-load /Power-down /Power-leakage /Lightning-protection etc.
Operating Temperature	-10℃~+40℃
Operating Humicity	10-80% no condensation
Storage Temperature	-20℃~+60℃
Storage Humicity	10-85% no condensation
Control system parameter	
Color temperature	Adjustable by software.
Brightness level	256 levels, automatic or manual adjustment.
Control way	Computer, real-time, off-line, wireless, internet etc.
Communication Distance	Cat5 UTP 100 meters, max. 130 meters, or optical fiber.
Packing	
Carton	40pcs/carton, size: 475*380*440mm, weight: 20.0Kgs

Note: The specification may subject to change without prior notice.

CE RoHS FC CB


GKGD

Specification of P3.33 Indoor LED Module

Module	Module photo
Pixel pitch	3mm
Pixel Density	111.111 dots/m²
Pixel configuration	1R1G1B
LED type	SMD2121
Module size	W320*H160mm
Module weight	365g
Module resolution	W96*H48 dots
Module QTY/ m²	19.53 pcs/ m²
Min. Viewing Distance	>3m
Brightness	>600 cd/m²
Viewing Angle	H:>120° V:>120°
Driving Mode	1/24 scan constant current
Interface	HUB75E
Input voltage	4.8-5.5VDC
Max. Power Consumption	430 w/m²
Avg. Power Consumption	215 w/m²
Max. Current	4.4A
Gray Level	16bits (32768)
Vedio frame rate	60 frames/s
Refresh Rate	>1920Hz &3840Hz
Defective Dots Rate	<0.0001 (LED industry standard: ≤ 0.0003)
Decay Rate	<5%/year
Brightness Conformity	>95%
Colors	16384*
MTBF	>10000 hours
Lifespan	>100000 hours
Protective function	Over-heat/Over-load /Power-down /Power-leakage /Lightning-protection etc.
Operating Temperature	-10℃~+40℃
Operating Humicity	10-80% no condensation
Storage Temperature	-20℃~+60℃
Storage Humicity	10-85% no condensation
Control system parameter	
Color temperature	Adjustable by software.
Brightness level	256 levels, automatic or manual adjustment.
Control way	Computer, real-time, off-line, wireless, internet etc.
Communication Distance	Cat5 UTP 100 meters, max. 130 meters, or optical fiber.
Packing	
Carton	40pcs/carton, size: 475*380*440mm, weight: 20.0Kgs

Note: The specification may subject to change without prior notice.

CE RoHS FC CB

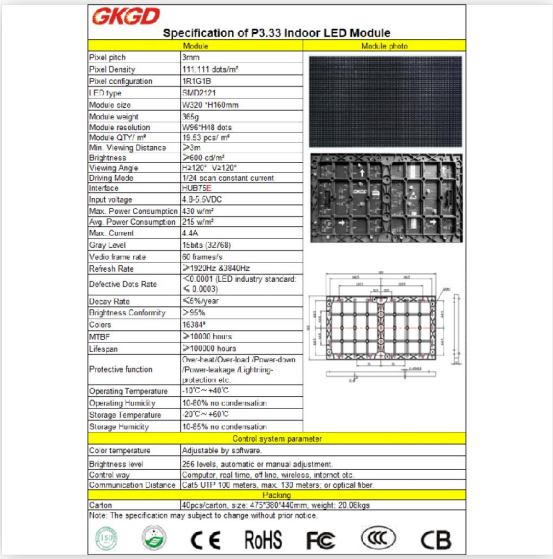Модуль светодиодный Indoor P3,33 SMD RGB HJMA109-094 (Уценка,после ремонта, гарантия 6 месяцев)

Артикул HJMA109-094 P3,33 indoor RGB

В наличии	**4 шт.**
Склад Красноярск	4 шт.

Характеристики

Производитель	GKGD
Шаг пикселя, mm	3.33
Плотность пикселя, pix/m2	111.111
Конфигурация пикселя	1R1G1B
Тип светодиода	SMD2121
Размер модуля, mm	320*160
Вес модуля, g	365
Разрешение модуля, mm	96*48
Количество модулей в m2	19.53
Минимальное расстояние для просмотра, m	3
Яркость, cd/m2	600
Угол обзора	120
Интерфейс	HUB75E
Напряжение, VDC	4.8-5.5
Максимальное потребление, w/m2	430
Среднее потребление, w/m2	215
Уровень серого	15 bit
Кадров в секунду	60
Частота обновления, Hz	1920

Перегрев, перегрузка, отключение питания, утечка энергии, молниезащита

Рабочий диапазон температур, C	от -10 до +40
Рабочий диапазон влажности, %	10-80
Температура хранения, C	от -20 до +60
Влажность при хранении, %	10-85

Компьютер, в режиме реального времени, автономный, беспроводной, интернет

Расстояние связи, m	Cat5 UTP 100-130; или оптическое волокно
Уровень яркости	256 уровней, автоматическая или ручная регулировка.
Цветовая температура	Регулируется программным обеспечением
Цвет сравнения	RGB