



# **Пиксель светодиодный** **PTN-40 (JR-LZD-Q40RGB).** **0,5м. (3 пикселя).**


Артикул PTN-40 (JR-LZD-Q40RGB)

**В наличии            1**  
**упак.**

Склад Новосибирск    1упак.

### Характеристики

- Производитель ..... SignImpress
- Цвет свечения ..... RGB
- Напряжение, V ..... 12
- Мощность, W ..... 1,5
- Степень защиты, IP ..... 65
- Тип светодиода ..... SMD
- Материал корпуса ..... Пластик
- Управляется контроллером ..... CS1, CS12, CS4, CS8
- Диаметр, мм ..... 40
- Угол рассеивания ..... 120
- Гарантия ..... 1год

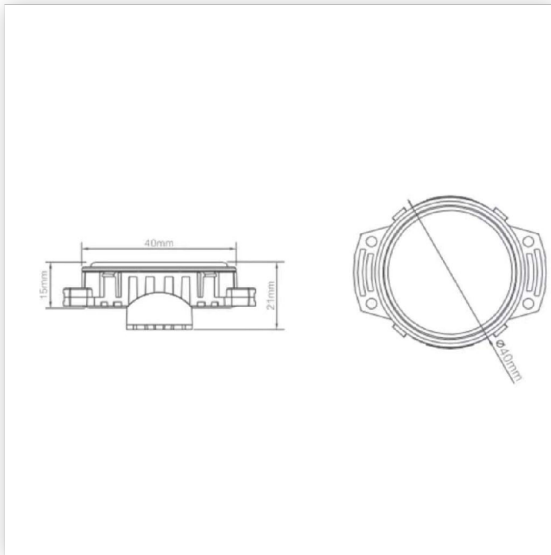

**LED pixel light**  
**PTN-40**

- Super 7C color, not easy to become yellow, not heat, high luminous flux  
- Multiple installation design for easy installation and maintenance  
- 4 LEDs included, 5683 SMD chip, 40mm diameter light size  
- Flexible material can be rolled to fit any shape (20°C-50°C)  
- Features of high power chip, high flux, high luminous efficiency.

Basic parameters		Optical parameters	
Light temperature	White color (5000K-5200K)	Rated luminous flux	100lm
Beam angle	120°	Beam angle	65°
Color depth	3	Luminous efficacy	100lm/W
Life span	50000h	Application parameters	
Mounting height	20mm	Mounting distance	20mm
MCU	32-bit MCU (MOS)	Working voltage	DC 12V
Installation distance	10m	IP rating	IP65
Light height	100mm	Protection type	Open
Optical lens	100mm	Mechanical parameters	
Material	Polyester	Wedge	10mm
Control Method	remote or DMX512/S1	Mounting hole	5mm
Finish	1	Construction	PC
Environmental parameters		Temp. range	-30~60
Relative humidity	Max	Wind	Max
Min. temp.	-	Shock	Max
Max. temp.	-	Height	1.5m
Relative humidity	-		
Max. wind speed	15-30km/h (optional)		
Construction type	LED		

