



Модуль светодиодный Outdoor P6,67 SMD RGB GKGD

Артикул P6,67 Outdoor RGB


В наличии 0 шт.

Характеристики

| | |
|---|---------|
| Производитель | GKGD |
| Цвет свечения | RGB |
| Шаг пикселя, мм | 6.67 |
| Плотность пикселя, pix/m2 | 22 500 |
| Конфигурация пикселя | 1R1G1B |
| Тип светодиода | SMD2727 |
| Размер модуля, мм | 320*160 |
| Вес модуля, г | 473.3 |
| Разрешение модуля, мм | 48*24 |
| Количество модулей в m2 | 19.53 |
| Минимальное расстояние для просмотра, м ... | 8 |
| Яркость, cd/m2 | 5000 |
| Угол обзора | 120 |
| Интерфейс | HUB75 |
| Напряжение, VDC | 5 |
| Максимальное потребление, w/m2 | 664 |
| Среднее потребление, w/m2 | 332 |
| Уровень серого | 16 bit |
| Кадров в секунду | 60 |
| Частота обновления, HZ | 1920 |

| Specification of P6.67 Outdoor LED Module | | Module photo |
|---|---|--------------|
| Pixel pitch | 6.67mm | |
| Pixel Density | 22500 dots/m² | |
| Pixel configuration | 1R1G1B | |
| LED type | SMD2727 | |
| Module size | W320*H160mm | |
| Module weight | 173.2g | |
| Module resolution | 144*72 dots | |
| Module GTV/ m² | 16.63 pcs/㎡ | |
| Min. Viewing Distance | >8m | |
| Brightness | >5000 cd/m² | |
| Viewing Angle | Hs120° Vx120° | |
| Driving Mode | 1/8 scan constant current | |
| Interface | HUB75 | |
| Input voltage | 5 VDC | |
| Max. Power Consumption | 664 w/m² | |
| Avg. Power Consumption | 332 w/m² | |
| Max. Current | 6.9 A | |
| Gray Level | 16bits (65536) | |
| Video frame rate | 50 frames/s | |
| Refresh Rate | >1920Hz >3840Hz | |
| Defective Data Rate | <0.0001 (LED industry standard: <0.0003) | |
| Decay Rate | <5%/year | |
| Brightness Conformity | >95% | |
| Colors | >6553P | |
| MTBF | >10000 Hours | |
| Lifespan | >10000 hours | |
| Protective function | Over-heat/Over-load /Power down /Power-voltage /Lightning-protection etc. | |
| Operating Temperature | -40℃~+88℃ | |
| Operating Humidity | 10-80% no condensation | |
| Storage Temperature | -30℃~+88℃ | |
| Storage Humidity | 10-85% no condensation | |
| Control system parameter | | |
| Color temperature | Adjustable by software | |
| Brightness level | 256 levels, automatic or manual adjustment | |
| Control way | Computer, real time, 48 lines, wireless, infrared etc. | |
| Communicator Distance | Cable: UTP 130 meters, max. 130 meters or optical fiber | |
| Packaging | | |
| Carton | 140pcs/carton, size: 592*954*98mm, weight: 22.8kg | |

Note: The specification may subject to change without prior notice.

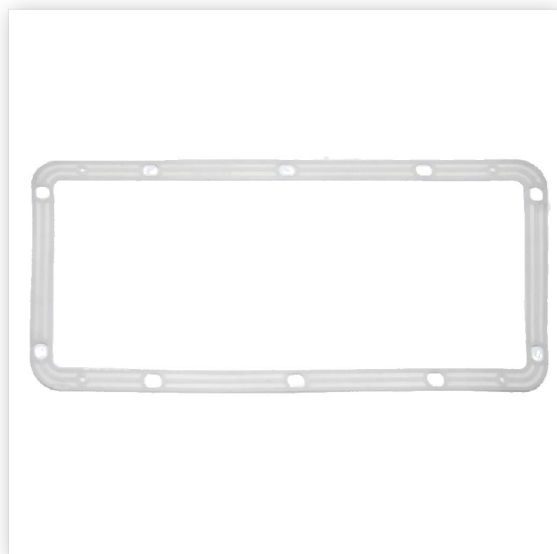

Перегрев, перегрузка, отключение питания, утечка энергии, молниезащита
 Рабочий диапазон температур, С от -40 до +80
 Рабочий диапазон влажности, % 10-85

